



### Intellimod™ L-Series Three Phase IGBT Inverter + Brake 75 Amperes/600 Volts

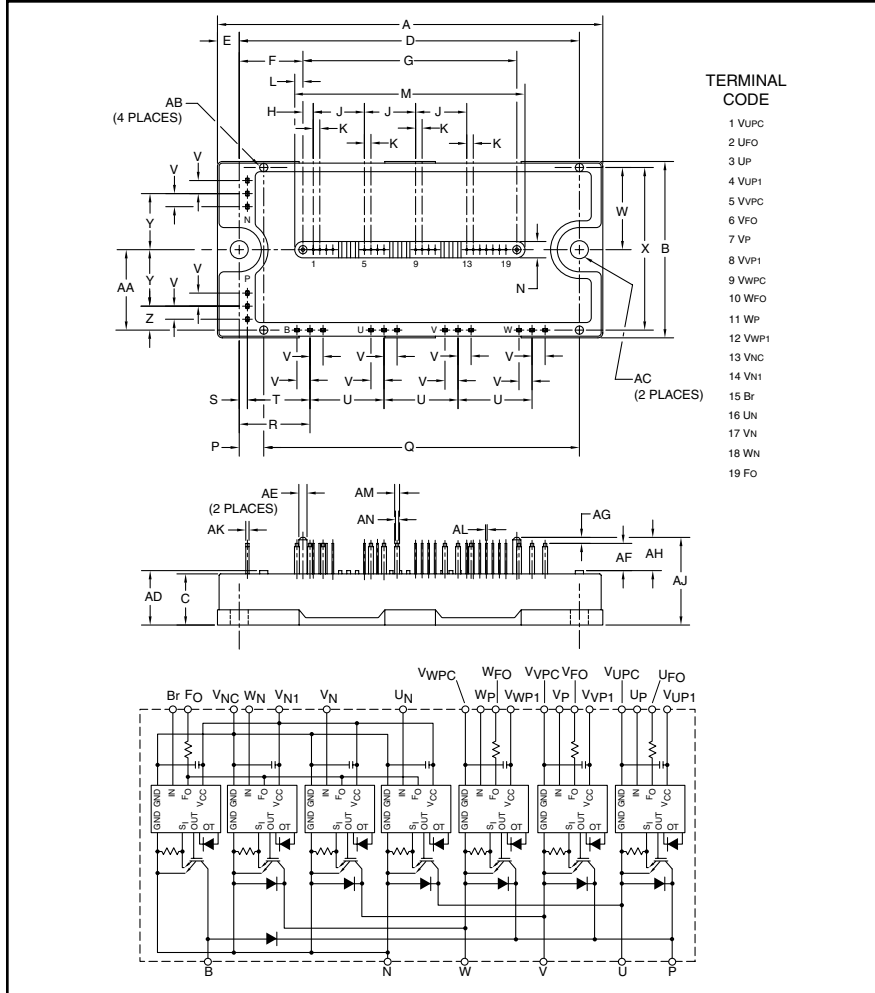

**TERMINAL CODE**

- 1 VUPC
- 2 UFO
- 3 UP
- 4 VUP1
- 5 VVPC
- 6 VFO
- 7 VP
- 8 VVP1
- 9 VWPC
- 10 WFO
- 11 WP
- 12 WVP1
- 13 VNC
- 14 VN1
- 15 Br
- 16 UN
- 17 VN
- 18 WN
- 19 FO

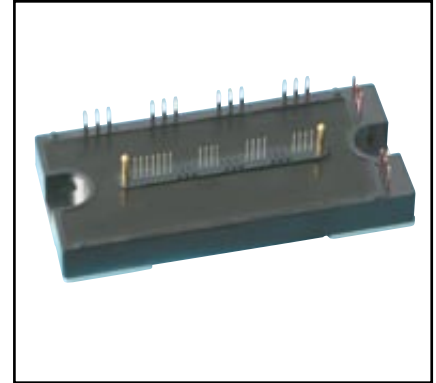

**Description:**  
Powerex Intellimod™ Intelligent Power Modules are isolated base modules designed for power switching applications operating at frequencies to 20kHz. Built-in control circuits provide optimum gate drive and protection for the IGBT and free-wheel diode power devices.

- Features:**
- Complete Output Power Circuit
  - Gate Drive Circuit
  - Protection Logic
    - Short Circuit
    - Over Temperature
    - Using On-chip Temperature Sensing
    - Under Voltage
  - Low Loss Using 5th Generation IGBT Chip

- Applications:**
- Inverters
  - UPS
  - Motion/Servo Control
  - Power Supplies

**Ordering Information:**  
Example: Select the complete part number from the table below -i.e. PM75RLB060 is a 600V, 75 Ampere Intellimod™ Intelligent Power Module.

Outline Drawing and Circuit Diagram

Dimensions	Inches	Millimeters
A	4.72	120.0
B	2.17	55.0
C	0.63	16.0
D	4.17	106.0
E	0.28	7.0
F	0.78	19.75
G	2.62	66.5
H	0.13	3.25
J	0.63	16.0
K	0.08	2.0
L	0.10	2.5
M	2.81	71.5
N	0.20	5.0
P	0.31	7.75
Q	3.87	98.25
R	0.87	22.0
S	0.10	2.5
T	0.77	19.5
U	0.91	23.0

Dimensions	Inches	Millimeters
V	0.16	4.0
W	1.01	25.75
X	2.00	50.75
Y	0.69	17.5
Z	0.30	7.5
AA	0.98	25.0
AB	0.10 Dia.	Dia. 2.5
AC	0.22 Dia.	Dia. 5.5
AD	0.67	17.0
AE	0.10 Dia.	Dia. 2.5
AF	0.33	8.5
AG	0.08	2.0
AJ	1.08	27.5
AK	0.04	1.0
AL	0.02 Sq.	Sq. 0.5
AM	0.06	1.5
AN	0.04	1.0

Type	Current Rating Amperes	V <sub>CES</sub> Volts (x 10)
PM	75	60

**PM75RLB060**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
**75 Amperes/600 Volts**

**Absolute Maximum Ratings,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	PM75RLB060	Units
Power Device Junction Temperature	$T_j$	-20 to 150	$^\circ\text{C}$
Storage Temperature	$T_{\text{stg}}$	-40 to 125	$^\circ\text{C}$
Mounting Torque, M5 Mounting Screws	—	31	in-lb
Module Weight (Typical)	—	340	Grams
Supply Voltage, Surge (Applied between P - N)	$V_{\text{CC(surge)}}$	550	Volts
Self-protection Supply Voltage Limit (Short Circuit protection Capability)*	$V_{\text{CC(prot.)}}$	400	Volts
Isolation Voltage, AC 1 minute, 60Hz Sinusoidal	$V_{\text{ISO}}$	2500	Volts

\*VD = 13.5 ~ 16.5V, Inverter Part,  $T_j = 125^\circ\text{C}$

**IGBT Inverter Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_C$	75	Amperes
Peak Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_{\text{CP}}$	150	Amperes
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	300	Watts


**IGBT Brake Sector**

Collector-Emitter Voltage ( $V_D = 15\text{V}$ , $V_{\text{CIN}} = 15\text{V}$ )	$V_{\text{CES}}$	600	Volts
Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_C$	50	Amperes
Peak Collector Current ( $T_C = 25^\circ\text{C}$ )	$\pm I_{\text{CP}}$	100	Amperes
Collector Dissipation ( $T_C = 25^\circ\text{C}$ )	$P_C$	228	Watts
Diode Rated DC Reverse Voltage ( $T_C = 25^\circ\text{C}$ )	$V_{\text{R(DC)}}$	600	Volts
Diode Forward Current	$I_F$	50	Amperes


**Control Sector**

Supply Voltage (Applied between $V_{\text{UP1}}-V_{\text{UPC}}$ , $V_{\text{VP1}}-V_{\text{VPC}}$ , $V_{\text{WP1}}-V_{\text{WPC}}$ , $V_{\text{N1}}-V_{\text{Nc}}$ )	$V_D$	20	Volts
Input Voltage (Applied between $U_P-V_{\text{UPC}}$ , $V_P-V_{\text{VPC}}$ , $W_P-V_{\text{WPC}}$ , $U_N-V_N-V_{\text{Nc}}-Br-V_{\text{Nc}}$ )	$V_{\text{CIN}}$	20	Volts
Fault Output Supply Voltage (Applied between $U_{\text{FO}}-V_{\text{UPC}}$ , $V_{\text{FO}}-V_{\text{VPC}}$ , $W_{\text{FO}}-V_{\text{WPC}}$ , $F_O-V_{\text{Nc}}$ )	$V_{\text{FO}}$	20	Volts
Fault Output Current ( $U_{\text{FO}}$ , $V_{\text{FO}}$ , $W_{\text{FO}}$ , $F_O$ Terminals)	$I_{\text{FO}}$	20	mA

Note 1:  $T_C$  (Base Plate)  
Measurement Point



Note 2:  $T_C$  (Under the Chip)  
Measurement Point



Arm Axis	UP		VP		WP		UN		VN		WN		Br	
	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi	IGBT	FWDi
X	28.7	28.7	65.2	65.2	85.3	85.3	38.0	38.0	55.4	55.4	75.5	75.5	19.0	23.0
Y	-6.6	0.85	-6.6	2.5	-6.6	2.5	4.6	-4.5	4.6	-4.5	4.6	-4.5	-7.3	6.6

**PM75RLB060**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
**75 Amperes/600 Volts**

**Electrical and Mechanical Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristics	Symbol	Test Conditions	Min.	Typ.	Max.	Units
<b>IGBT Inverter Sector</b>						
Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$	—	—	10	mA
Diode Forward Voltage	$V_{EC}$	$-I_C = 75A, V_{CIN} = 15V, V_D = 15V$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 75A,$ $T_j = 25^\circ\text{C}$	—	1.6	2.1	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 75A,$ $T_j = 125^\circ\text{C}$	—	1.5	2.0	Volts
Inductive Load Switching Times	$t_{on}$		0.5	1.0	2.4	$\mu\text{s}$
	$t_{rr}$	$V_D = 15V, V_{CIN} = 0 \Leftrightarrow 15V$	—	0.2	0.4	$\mu\text{s}$
	$t_{C(on)}$	$V_{CC} = 300V, I_C = 75A$	—	0.4	1.0	$\mu\text{s}$
	$t_{off}$	$T_j = 125^\circ\text{C}$	—	1.2	2.5	$\mu\text{s}$
	$t_{C(off)}$		—	0.5	1.0	$\mu\text{s}$

**IGBT Brake Sector**

Collector-Emitter Cutoff Current	$I_{CES}$	$V_{CE} = V_{CES}, V_D = 15V, T_j = 25^\circ\text{C}$	—	—	1.0	mA
		$V_{CE} = V_{CES}, V_D = 15V, T_j = 125^\circ\text{C}$	—	—	10	mA
Diode Forward Voltage	$V_{FM}$	$I_F = 50A$	—	2.2	3.3	Volts
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 25^\circ\text{C}$	—	1.6	2.1	Volts
		$V_D = 15V, V_{CIN} = 0V, I_C = 50A,$ $T_j = 125^\circ\text{C}$	—	1.5	2.0	Volts

**Control Sector**

Short Circuit Trip Level ( $-20^\circ\text{C} \leq T_j \leq 125^\circ\text{C}, V_D = 15V$ )	SC	Inverter Part	150	—	—	Amperes
		Brake Part	100	—	—	Amperes
Short Circuit Current Delay Time	$t_{off(SC)}$	$V_D = 15V$	—	0.2	—	$\mu\text{s}$
Over Temperature Protection (Detect $T_j$ of IGBT Chip)	OT	Trip Level	135	145	155	$^\circ\text{C}$
	$OT_R$	Reset Level	—	125	—	$^\circ\text{C}$
Supply Circuit Under-voltage Protection ( $-20 \leq T_j \leq 125^\circ\text{C}$ )	UV	Trip Level	11.5	12.0	12.5	Volts
	$UV_R$	Reset Level	—	12.5	—	Volts
Circuit Current	$I_D$	$V_D = 15V, V_{CIN} = 15V, V_{N1}-V_{NC}$	—	20	30	mA
		$V_D = 15V, V_{CIN} = 15V, V_{XP1}-V_{XPC}$	—	5	10	mA
Input ON Threshold Voltage	$V_{th(on)}$	Applied between $U_P-V_{UPC}$ ,	1.2	1.5	1.8	Volts
Input OFF Threshold Voltage	$V_{th(off)}$	$V_P-V_{VPC}, W_P-V_{WPC}, U_N-V_N, W_N-Br-V_{NC}$	1.7	2.0	2.3	Volts
Fault Output Current*	$I_{FO(H)}$	$V_D = 15V, V_{CIN} = 15V$	—	—	0.01	mA
	$I_{FO(L)}$	$V_D = 15V, V_{CIN} = 15V$	—	10	15	mA
Fault Output Pulse Width*	$t_{FO}$	$V_D = 15V$	1.0	1.8	—	ms

\*Fault output is given only when the internal SC, OT and UV protections schemes of either upper or lower device operate to protect it.

**PM75RLB060**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
 75 Amperes/600 Volts




**Thermal Characteristics,  $T_j = 25^\circ\text{C}$  unless otherwise specified**

Characteristic	Symbol	Condition	Min.	Typ.	Max.	Units
Junction to Case Thermal Resistance	$R_{th(j-c)Q}$	Inverter IGBT (Per 1/6 Module) (Note 1)	—	—	0.42	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Inverter FWDi (Per 1/6 Module) (Note 1)	—	—	0.69	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Brake IGBT (Per 1/6 Module) (Note 1)	—	—	0.55	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Brake FWDi (Per 1/6 Module) (Note 1)	—	—	0.92	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Inverter IGBT (Per 1/6 Module) (Note 2)	—	—	0.32	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Inverter FWDi (Per 1/6 Module) (Note 2)	—	—	0.53	$^\circ\text{C/Watt}$
	$R_{th(j-c)Q}$	Brake IGBT (Per 1/6 Module) (Note 2)	—	—	0.42	$^\circ\text{C/Watt}$
	$R_{th(j-c)D}$	Brake FWDi (Per 1/6 Module) (Note 2)	—	—	0.71	$^\circ\text{C/Watt}$
Contact Thermal Resistance	$R_{th(c-f)}$	Case to Fin Per Module, Thermal Grease Applied (Note 1)	—	—	0.038	$^\circ\text{C/Watt}$

**Recommended Conditions for Use**


Characteristic	Symbol	Condition	Value	Units
Supply Voltage	$V_{CC}$	Applied across P-N Terminals	$\leq 400$	Volts
Control Supply Voltage*	$V_D$	Applied between $V_{UP1}$ - $V_{UPC}$ , $V_{VP1}$ - $V_{VPC}$ , $V_{WP1}$ - $V_{WPC}$ , $V_{N1}$ - $V_{NC}$	$15.0 \pm 1.5$	Volts
Input ON Voltage	$V_{CIN(on)}$	Applied between $U_P$ - $V_{UPC}$ ,	$\leq 0.8$	Volts
Input OFF Voltage	$V_{CIN(off)}$	$V_P$ - $V_{VPC}$ , $W_P$ - $V_{WPC}$ , $U_N$ - $V_{NC}$ , $W_N$ - $Br$ - $V_{NC}$	$\geq 9.0$	Volts
PWM Input Frequency	$f_{PWM}$	—	$\leq 20$	kHz
Arm Shoot-through Blocking Time	$t_{DEAD}$	Input Signal	$\geq 2.0$	$\mu\text{s}$

\* With ripple satisfying the following conditions:  $dv/dt$  swing  $\leq \pm 5\text{V}/\mu\text{s}$ , Variation  $\leq 2\text{V}$  peak to peak.

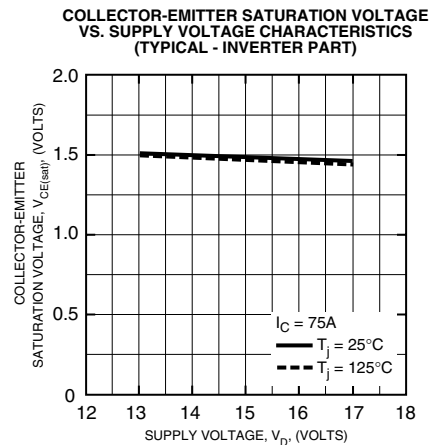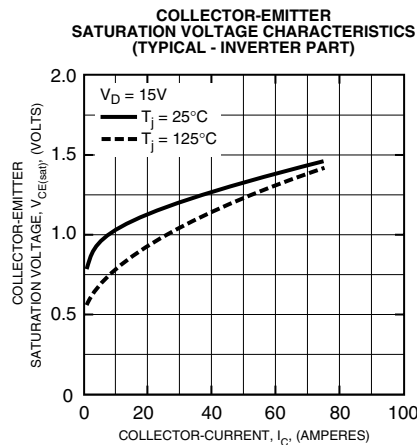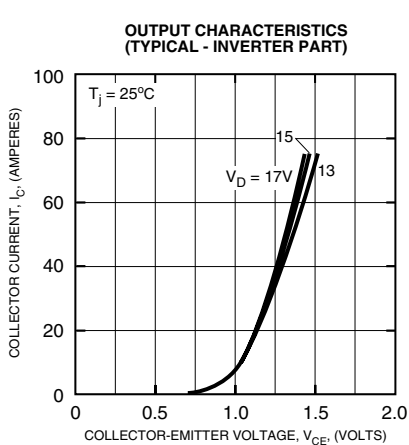


**PM75RLB060**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
**75 Amperes/600 Volts**


**FREE-WHEEL DIODE FORWARD CHARACTERISTICS (TYPICAL - INVERTER PART)**

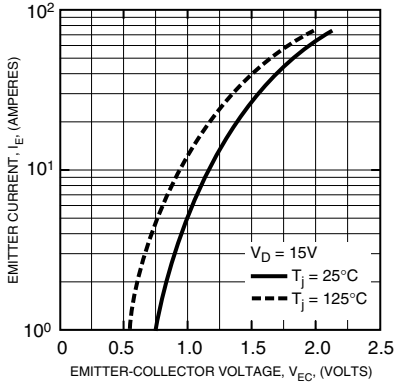


**REVERSE RECOVERY CHARACTERISTICS (TYPICAL - INVERTER PART)**

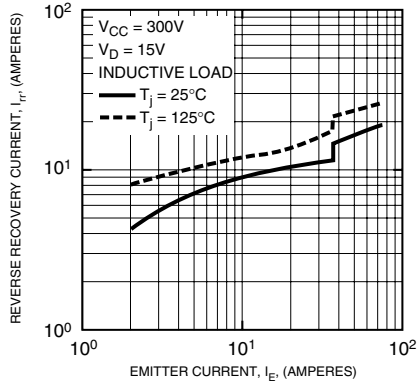


**REVERSE RECOVERY CHARACTERISTICS (TYPICAL - INVERTER PART)**

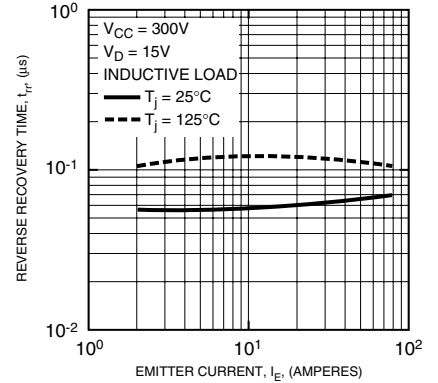


**SWITCHING LOSS (ON) VS. COLLECTOR CURRENT (TYPICAL - INVERTER PART)**

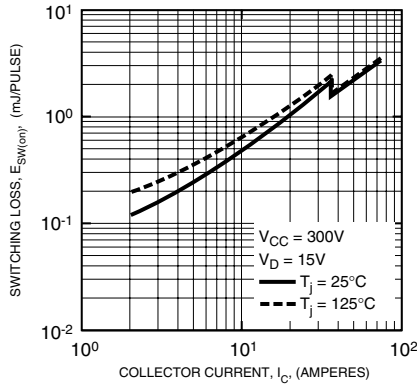


**SWITCHING LOSS (OFF) VS. COLLECTOR CURRENT (TYPICAL - INVERTER PART)**

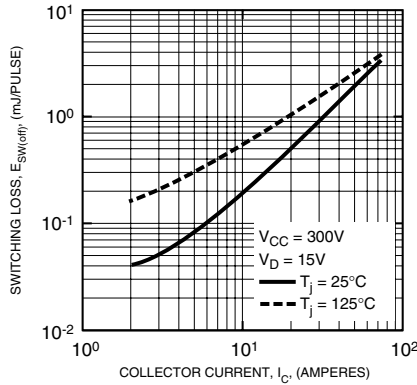


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL - INVERTER PART)**

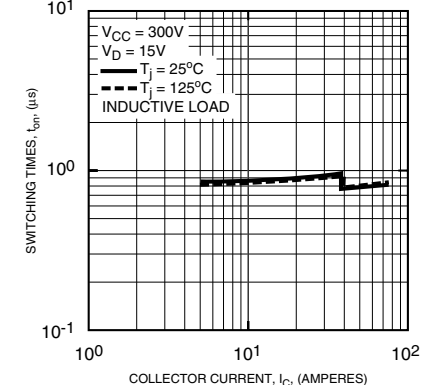


**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL - INVERTER PART)**

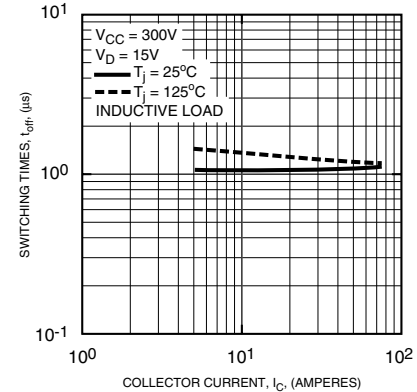

**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL - INVERTER PART)**

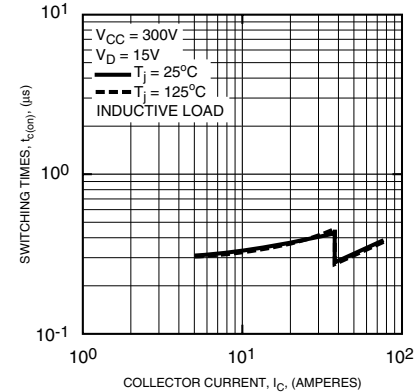

**SWITCHING TIME VS. COLLECTOR CURRENT (TYPICAL - INVERTER PART)**

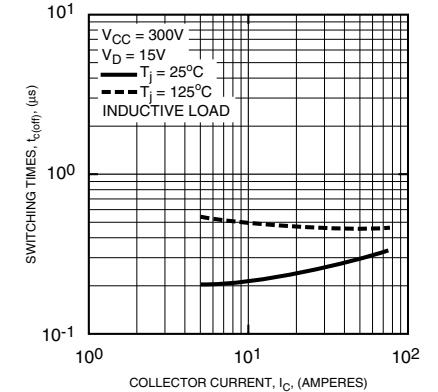

**PM75RLB060**  
**Intellimod™ L-Series**  
**Three Phase IGBT Inverter + Brake**  
**75 Amperes/600 Volts**

