

HC-B 10-TFQ/PG16S

Order No.: 1771244

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1771244>

Sleeve housing, for double locking latch, height 52 mm, with screw connection, 1x Pg16, lateral cable entry

Commercial data

| | |
|--------------------------|--------------------|
| EAN | 4017918035983 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Weight/Piece | 0.15576 KG |
| Catalog page information | Page 484 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
01/31/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 52 mm |
| Width | 43 mm |

| | |
|---------------------------------|--------------------------|
| Length | 73 mm |
| Housing type | Sleeve housings |
| Locking type | For double locking latch |
| Type of the screw connection | 1x Pg16 |
| Pg screw connection | With |
| Wrench size, union nut | 22 mm |
| Cable exit | Lateral |
| External cable diameter | 7.5 mm ... 15 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Cable gland material | Nickel-plated brass |
| Cable seal material | NBR |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

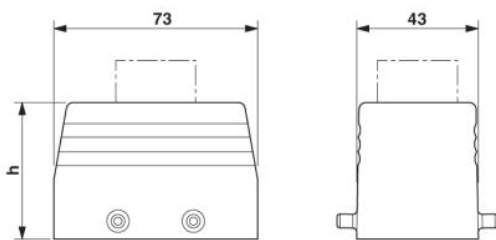

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;