

part number: description:

10-00661

Cable, 100 mm, USB B receptacle to USB mini A male, 28 AWG, 30-00088 wire

date: August 25, 2011 rev: A

page: 1 of 2


**Specifications:** 

connector description (1)	USB B receptacle
overmold (2)	inner: 30P, PVC, black; outer: 60P, PVC, black
wire description (3)	4C, 1PR + 2C, 28 AWG, UL2725, 30V, 80C, 3.8 mm, AL spiral + drain, VW-1, PVC, 60P, USB 2.0, P/N 30-00088
cable outer diameter	Ø3.8 mm
cable color	black
cable length	$100 \pm 15 \text{ mm}$
connector description (4)	mini USB A, male
overmold (5)	30P, PVC, black
label (6)	tensility.com, Made in China, Tensility P/N


## **Notes:**

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

**Mechanical drawing:** 

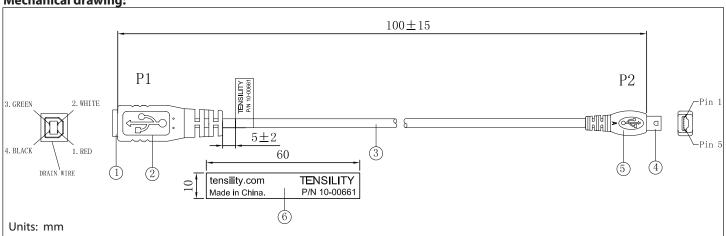

## Wiring diagram:



**tolerance** X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial	Date	
---------	------	--



10-00661

Cable, 100 mm, USB B receptacle to USB mini A male, 28 AWG, 30-00088 wire

date: August 25, 2011 rev: A

page: 2 of 2

Revision notes:			
Rev	Date	Description	
Α	August 25, 2011	initial release	

## **Specification Approval** Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility. Signature -Title Name Date Company \_ Branch \_\_