



2

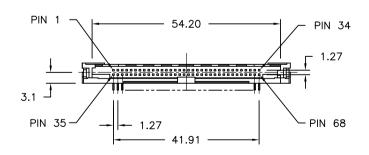



NOTES:

MATERIAL

HOUSING: HIGH TEMPERATURE THERMOPLASTIC PIN: COPPER ALLOY

FINISH

UNDER PLATING : 0.5µm MIN. Ni CONTACT AREA : 0.1µm MIN. GOLD OVER 0.5µm MIN. Pd—Ni SOLDER TAIL (TIN LEAD OPTION) : 2.5µm MIN. Sn—Pb

SOLDER TAIL (LEAD FREE OPTION) : 2.5µm MIN. PURE TIN

RECOMMENDED SCREW TORQUE: 1.0 TO 1.5 MAX in-lbs (1.2-1.7 cm-kgs). RECOMMENDED HOLD DOWN: 2mm SCREWS (95121-001)

AND NUTS (92869-001).

SEE SHEET 2 FOR P.C.B. LAYOUT.

IF LEAD FREE P/N. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.00MM MINIMUM THICK CIRCUIT BOARD.

LEAD FREE PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER

COUNTRY REGULATIONS AS DISCRIBLED IN GS-22-008

IF LEAD FREE P/N. PACKAGING MEETS GS-14-920 SPECIFICATION

PRODUCT SPEC: 110-263

mat	t'l. cod	e			sur	tα	ce /	اتما	era	nce	pro	Jec	tion	ppro	oduc	Ξt t						
					ISD1302 V ISD406 ISD1101								PCMCIA									
ltrecn nødr date					tolerances unless other							vise specifie atitle										
Α	V61089 RI		RHG 08/20/9		مم	ر ا	3	0.X±0		0.3		мм		RIGHT ANGLE CARDBUS								
В	V70388	RHG	05/2	2/97	إسار	ַרַיי	2	0.XX	(±0.13													
O	V12254 TFG 09/25		25/01	0°±2° =		7	0.XXX±0.05			sco	ile 1	:1	HEADER ASSEMBLY									
O	N05-0054 W		03/0	1/05	dr R		R.GRAPE 08/20/9			20/96				dwg no shee.t1of2 s						siz		
Ε	ELX-N-007945	ZK	11/0	1/11	eng	۷	D.BRANN 08/20/96			FC i			71294 A						٨			
					chr		D.BRAN	.BRANN		08/20/96									Ý			
				appd		D.BRANN		08/20/96					type Product Custor				ston	ner Drawir		ing		
she	et rev	visio	nĒ	Ε																		
ind	ex she	et	1	2																		

В

form: A4mmXLc

2

PDS: Rev :E3

STATUS:Released


Printed: Sep 12 2013

В


FCIconnect.com

3|

4

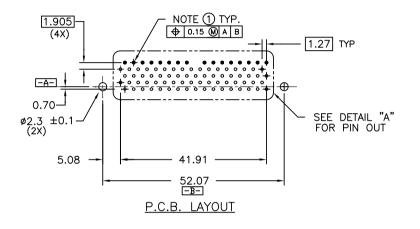

2

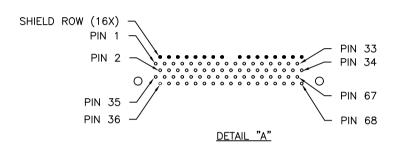

NOTES:

- 1 RECOMMENDED DIAMETER IS \$1.0. FOR PROCESSES USING PASTE REFLOW, HOLE MAY BE AS SMALL AS \$0.79.
- 2 ALL TOLERANCES ±0.15 UNLESS NOTED.

				surface tolerance ISD1302 ISD1406 ISD1101								DCMCIA									
ltrecn nødr date					tolerances unless other						Zpe.	rifie	utitl	.e							
Ε				angle		ട്.⊢—		0.X±0.3 0.XX±0.13		MM_		RIGHT ANGLE CARDBUS									
				0°±2	0°±2°		0.XXX	K±0.05		scale	ile 1	1:1	HEADER ASSEMBLY								
				dr		R.GRAPE		08/20/96		3		_	dwg	nc	no		sheet2of		f2	·2 si	
				eng	-		D.BRANN D.BRANN		20/96 20/96				71294					4			A.
				appd (D.BRANN		08/20/96					type Product Co			t Cu	ustomer Drav		Draw	vinç	

В

form: A4mmXLc

2

PDS: Rev :E 3

STATUS:Released

Printed: Sep 12,42013

В