




**2.5mm Round**  
**microLED® Optopipe™**  
**Optical Light Pipe, 8 Array**



**515-1063**

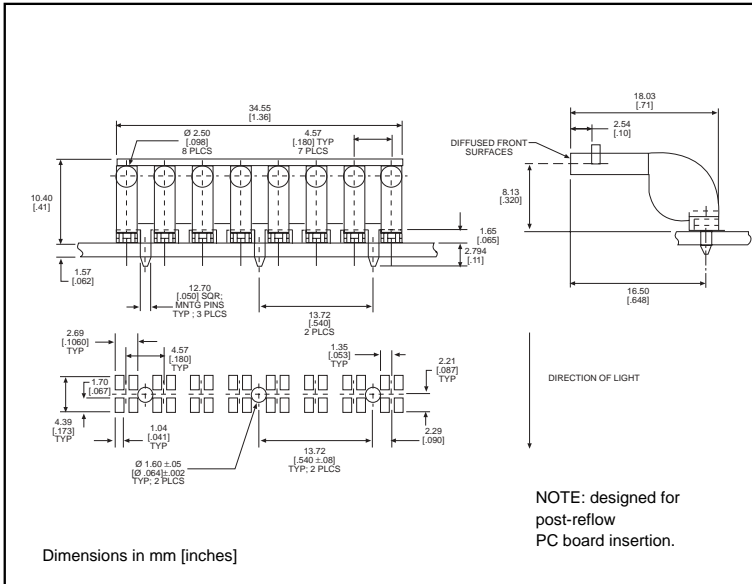

**Recommended**  
**MicroLED SMT LEDs**  
**for use with 515-1063**

| PART NO.     | PAGE # |
|--------------|--------|
| 597-3xx1-5xx | 1-30   |
| 597-77x1-5xx | 1-31   |

Solder Pad/Holes layout shown is for bi-color LEDs

Contact factory for single color layout

**Features**

- Combines with Dialight's 515-1062 Optopipe™ Light Pipe for bi-level SMT indicators
- Suitable for high density arrays (.120 min array pitch)
- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Secures to PCB by press-fit

**Operating/Storage Temperature**

-30°C to +100°C

**LED Data**

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

**Dialight Optopipe Light Pipe Description**

This Optopipe™ has 8 elements with a 2.5mm diameter placed on a narrow pitch. Although it is designed to be the upper element of a bi-level array, it functions well as a single level array. An appearance similar to our 3mm bi-level 553 Series, arrays can be achieved by utilizing the 515-1062 for the lower level array. Three press-fit pins securely hold it in place. The SMT LEDs are mounted in a straight line under the rear of the part on an 0.180" pitch. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe™ solutions for your applications.