


Sulfur tolerant chip resistors

SFR series Datasheet

Features

- 1) Special construction prevents sulfur gas penetration, significantly increasing reliability.
- 2) ROHM resistors have obtained ISO9001 / ISO / TS16949 certification.



Products list

Part No.	Size		Rated Limiting power element		Temperature coefficient	Resistance tolerance Resistance range		nce range	Operating temperature	Automotive grade
	(mm) (ir	(inch)	(70°C) (W)	voltage (V)	(ppm/°C)	(%)	(Ω)		range (°C)	available
	4005				±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)		
SFR01		0402	0.063	50	+500 / -250	J(±5%)	1.0≦R<10	(E24 series)	FF .4FF	Vaa
SPRUI	1005	0402			±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	Yes
				Jumper type) Rmax = 50 mΩ MAX. / Imax = 1 A						
		08 0603	0.10	0.10 50	±100	F(±1%)	10 ≦R≦10M	(E24/96 series)	-55 ∼ +155	Yes
SFR03	1608				±400	J(±5%)	1≦R<10	(E24 series)		
SERUS	1000	0003			±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155	165
					Jumper type) Rn	nax = 50mΩ M	AX. / Imax = 1A			1
	2042	2012 0805 0.125			±100	F(±1%)	10 ≦R≦2.2M	(E24/96 series)	EE 1455	
SFR10			0.125	0.125 150	±400	J(±5%)	1≦R<10	(E24 series)		Yes
	2012		012 0005	505		±200	J(±5%)	10 ≦R≦10M	(E24 series)	-55 ~ +155
					Jumper type) Rn	nax = 50mΩ M	AX. / Imax = 2A			

^{*} Design and specifications are subject to change without notice.

Part Number Description









1	0	5

Nominal resistance
Resistance code, 3 or 4 digits.

Part No.	
SFR (Sulfur tolerant chip resistors)	

Packagin	Packaging specifications code								
Part No.	Code	Packaging specifications	Quantity / Reel						
SFR01	MZP	Paper tape (2mm Pitch)	10,000						
SFR03	EZP	Paper tape (4mm Pitch)	5,000						
SFR10	EZP	Paper tape (4mm Pitch)	5,000						

Resistance tolerance	
F(±1%) J(±5%)	

00	000 denotes jumper type.								
	Resistance Resistance tolerance code								
	F J	: 4 digits : 3 digits							
EX	()	<u>.</u>							
	$1\Omega = 1R0$	(±5%)							
	$9.1\Omega = 9R1$	(±5%)							
	$10\Omega = 10R0 (\pm 1\%)$								
	100 (±5%)								
	$1M\Omega = 1004 (\pm 1\%)$								
	105	(±5%)							


Carefully check the specification sheet supplied with the product before using or ordering it.

^{*} E24 : Standard products, E96 : Custom products.

Chip resistor dimensions and markings

■ SFR 01


■ SFR 03/10



(Unit:mm)

Part No.	(mm)	(inch)	L	W	t	а	b	Marking existence *Including jumper type
SFR01	1005	0402	1.0±0.05	0.5±0.05	0.35±0.05	0.33±0.08	0.25 ^{+0.05} _{-0.10}	No
SFR03	1608	0603	1.60±0.10	0.80 ±0.10	0.45±0.10	0.40±0.10	0.30±0.20	Yes
SFR10	2012	0805	2.0±0.1	1.25±0.1	0.55±0.1	0.4±0.2	0.4±0.2	Yes

● Land pattern example



(Unit:mm)


Dimensions Part No.	А	В	С	D
SFR01	0.5	1.3	0.5	0.4
SFR03	1.0	2.0	0.8	0.5
SFR10	1.20	2.60	1.15	0.70

SFR series Datasheet

Derating curve

When the ambient temperature exceeds 70°C, power dissipation must be adjusted according to the derating curves below.

■SFR 01/03/10



Characteristics

Test items	Guaran	teed value	Test conditions	
lestiteriis	Resistor type	Jumper type	lest cortations	
Resistance	Se	e P.1	20°C	
Variation of resistance with temperature	Se	e P.1	Measurement: +25/+125°C	
Overload	±(2.0%+0.1Ω)	MAX 50mΩ	Rated voltage(current)×2.5, , 2s Maximum overload voltage※	
Solderability	Anew uniform co of 95% of the sur immersed and n damage.	•	Rosin-ethanol solution(25% weight) Soldering condition: 245±5°C Duration of immersion: 2.0±0.5s	
Resistance to soldering heat	\pm (1.0% + 0.05Ω) MAX 50mΩ No remarkable abnormality on the appearance.		Soldering condition: 260±5°C Duration of immersion: 10±1s	
Rapid change of temperature	±(1.0%+0.05Ω)	MAX 50mΩ	Test temp:-55°C~+125°C 5cycle	
Damp heat, steady state	±(3.0%+0.1Ω)	MAX 100mΩ	40°C, 93%(Relative humidity) Test time: 1,000h	
Endurance at 70°C	±(3.0%+0.1Ω)	MAX 100mΩ	Rated voltage(current),70°C 1.5h:ON – 0.5h:OFF Test time: 1,000h	
Endurance	±(3.0%+0.1Ω)	MAX 100mΩ	155°C Test time: 1,000h	
Resistance to solvent	±(1.0%+0.05Ω)	MAX 50mΩ	23±5°C, Immersion cleaning, 5±0.5min Solvent: 2-propanol	
Bend strength of the end face plating	±(1.0%+0.05Ω) Without mechanical data	MAX 50mΩ amage such as breaks.	-	

Compliance Standard(s): IEC60115-8

※Maximum overload voltage (Test voltage)


SFR01	SFR03	SFR10
100V	100V	200V



JISC 5201-8

●Tape dimensions


■Paper tape



					(Unit:mm)
Part No.	W	F	Е	A0	B0
SFR01	8.0±0.3	3.5±0.05	1.75±0.1	0.7±0.1	1.2±0.1
SFR03	8.0±0.3	3.5±0.05	1.75±0.1	1.1±0.1	1.9±0.1
SFR10	8.0±0.3	3.5±0.05	1.75±0.1	1.65 ^{+0.2} -0.1	2.4 ^{+0.2} -0.1

Part No.	D0	P0	P1	P2	T2
SFR01	Ф1.5 ^{+0.1}	4.0±0.1	2.0±0.05	2.0±0.05	MAX1.1
SFR03	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX1.1
SFR10	Ф1.5 ^{+0.1}	4.0±0.1	4.0±0.1	2.0±0.05	MAX 1.1

Reel dimensions

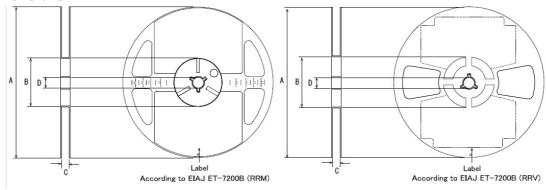

ā				(Unit:mm)
Part No.	Α	В	С	D
SFR01	0	.40	.4.0	
SFR03	Ф180 ⁰ -1.5	Ф60 ^{+1.0}	9 +1.0	Ф13±0.2
SFR10	-1.5	O	O	

Notice

Precaution on using ROHM Products

1. If you intend to use our Products in devices requiring extremely high reliability (such as medical equipment (Note 1), aircraft/spacecraft, nuclear power controllers, etc.) and whose malfunction or failure may cause loss of human life, bodily injury or serious damage to property ("Specific Applications"), please consult with the ROHM sales representative in advance. Unless otherwise agreed in writing by ROHM in advance, ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of any ROHM's Products for Specific Applications.

(Note1) Medical Equipment Classification of the Specific Applications

JAPAN	USA	EU	CHINA
CLASSⅢ	OL 400 TF	CLASS II b	ОГУООШ
CLASSIV	CLASSⅢ	CLASSⅢ	CLASSⅢ

- 2. ROHM designs and manufactures its Products subject to strict quality control system. However, semiconductor products can fail or malfunction at a certain rate. Please be sure to implement, at your own responsibilities, adequate safety measures including but not limited to fail-safe design against the physical injury, damage to any property, which a failure or malfunction of our Products may cause. The following are examples of safety measures:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits to reduce the impact of single or multiple circuit failure
- 3. Our Products are not designed under any special or extraordinary environments or conditions, as exemplified below. Accordingly, ROHM shall not be in any way responsible or liable for any damages, expenses or losses arising from the use of any ROHM's Products under any special or extraordinary environments or conditions. If you intend to use our Products under any special or extraordinary environments or conditions (as exemplified below), your independent verification and confirmation of product performance, reliability, etc, prior to use, must be necessary:
 - [a] Use of our Products in any types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use of our Products outdoors or in places where the Products are exposed to direct sunlight or dust
 - [c] Use of our Products in places where the Products are exposed to sea wind or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use of our Products in places where the Products are exposed to static electricity or electromagnetic waves
 - [e] Use of our Products in proximity to heat-producing components, plastic cords, or other flammable items
 - If Sealing or coating our Products with resin or other coating materials
 - [g] Use of our Products without cleaning residue of flux (even if you use no-clean type fluxes, cleaning residue of flux is recommended); or Washing our Products by using water or water-soluble cleaning agents for cleaning residue after soldering
 - [h] Use of the Products in places subject to dew condensation
- 4. The Products are not subject to radiation-proof design.
- 5. Please verify and confirm characteristics of the final or mounted products in using the Products.
- 6. In particular, if a transient load (a large amount of load applied in a short period of time, such as pulse. is applied, confirmation of performance characteristics after on-board mounting is strongly recommended. Avoid applying power exceeding normal rated power; exceeding the power rating under steady-state loading condition may negatively affect product performance and reliability.
- 7. De-rate Power Dissipation depending on ambient temperature. When used in sealed area, confirm that it is the use in the range that does not exceed the maximum junction temperature.
- 8. Confirm that operation temperature is within the specified range described in the product specification.
- 9. ROHM shall not be in any way responsible or liable for failure induced under deviant condition from what is defined in this document.

Precaution for Mounting / Circuit board design

- 1. When a highly active halogenous (chlorine, bromine, etc.) flux is used, the residue of flux may negatively affect product performance and reliability.
- 2. In principle, the reflow soldering method must be used on a surface-mount products, the flow soldering method must be used on a through hole mount products. If the flow soldering method is preferred on a surface-mount products, please consult with the ROHM representative in advance.

For details, please refer to ROHM Mounting specification

Precautions Regarding Application Examples and External Circuits

- 1. If change is made to the constant of an external circuit, please allow a sufficient margin considering variations of the characteristics of the Products and external components, including transient characteristics, as well as static characteristics.
- 2. You agree that application notes, reference designs, and associated data and information contained in this document are presented only as guidance for Products use. Therefore, in case you use such information, you are solely responsible for it and you must exercise your own independent verification and judgment in the use of such information contained in this document. ROHM shall not be in any way responsible or liable for any damages, expenses or losses incurred by you or third parties arising from the use of such information.

Precaution for Electrostatic

This Product is electrostatic sensitive product, which may be damaged due to electrostatic discharge. Please take proper caution in your manufacturing process and storage so that voltage exceeding the Products maximum rating will not be applied to Products. Please take special care under dry condition (e.g. Grounding of human body / equipment / solder iron, isolation from charged objects, setting of lonizer, friction prevention and temperature / humidity control).

Precaution for Storage / Transportation

- 1. Product performance and soldered connections may deteriorate if the Products are stored in the places where:
 - [a] the Products are exposed to sea winds or corrosive gases, including Cl2, H2S, NH3, SO2, and NO2
 - [b] the temperature or humidity exceeds those recommended by ROHM
 - [c] the Products are exposed to direct sunshine or condensation
 - [d] the Products are exposed to high Electrostatic
- Even under ROHM recommended storage condition, solderability of products out of recommended storage time period
 may be degraded. It is strongly recommended to confirm solderability before using Products of which storage time is
 exceeding the recommended storage time period.
- 3. Store / transport cartons in the correct direction, which is indicated on a carton with a symbol. Otherwise bent leads may occur due to excessive stress applied when dropping of a carton.
- 4. Use Products within the specified time after opening a humidity barrier bag. Baking is required before using Products of which storage time is exceeding the recommended storage time period.

Precaution for Product Label

A two-dimensional barcode printed on ROHM Products label is for ROHM's internal use only.

Precaution for Disposition

When disposing Products please dispose them properly using an authorized industry waste company.

Precaution for Foreign Exchange and Foreign Trade act

Since concerned goods might be fallen under listed items of export control prescribed by Foreign exchange and Foreign trade act, please consult with ROHM in case of export.

Precaution Regarding Intellectual Property Rights

- 1. All information and data including but not limited to application example contained in this document is for reference only. ROHM does not warrant that foregoing information or data will not infringe any intellectual property rights or any other rights of any third party regarding such information or data.
- 2. ROHM shall not have any obligations where the claims, actions or demands arising from the combination of the Products with other articles such as components, circuits, systems or external equipment (including software).
- 3. No license, expressly or implied, is granted hereby under any intellectual property rights or other rights of ROHM or any third parties with respect to the Products or the information contained in this document. Provided, however, that ROHM will not assert its intellectual property rights or other rights against you or your customers to the extent necessary to manufacture or sell products containing the Products, subject to the terms and conditions herein.

Other Precaution

- 1. This document may not be reprinted or reproduced, in whole or in part, without prior written consent of ROHM.
- 2. The Products may not be disassembled, converted, modified, reproduced or otherwise changed without prior written consent of ROHM.
- In no event shall you use in any way whatsoever the Products and the related technical information contained in the Products or this document for any military purposes, including but not limited to, the development of mass-destruction weapons.
- 4. The proper names of companies or products described in this document are trademarks or registered trademarks of ROHM, its affiliated companies or third parties.

Notice-PAA-E Rev.003

General Precaution

- 1. Before you use our Products, you are requested to care fully read this document and fully understand its contents. ROHM shall not be in an y way responsible or liable for failure, malfunction or accident arising from the use of a ny ROHM's Products against warning, caution or note contained in this document.
- 2. All information contained in this docume nt is current as of the issuing date and subject to change without any prior notice. Before purchasing or using ROHM's Products, please confirm the latest information with a ROHM sale s representative.
- 3. The information contained in this doc ument is provided on an "as is" basis and ROHM does not warrant that all information contained in this document is accurate an d/or error-free. ROHM shall not be in an y way responsible or liable for any damages, expenses or losses incurred by you or third parties resulting from inaccuracy or errors of or concerning such information.

Notice – WE © 2015 ROHM Co., Ltd. All rights reserved. Rev.001



SFR01MZPF - Web Page

Distribution Inventory

Part Number	SFR01MZPF
Package	
Unit Quantity	10000
Minimum Package Quantity	10000
Packing Type	Taping
Constitution Materials List	inquiry
RoHS	Yes